


# WORKHORSE™ Professional Grade

## PURE WATER Storage

### Features:

- ◆ Plug and play interconnectivity with Professional Grade RO system installs in minutes.
- ◆ Cone bottom Design for complete drainage; complete valved drain assembly.
- ◆ Polyethylene tank for minimum release of extract-ables.
- ◆ Cylindrical tank with constant internal surface spray down designed for minimal biological growth.
- ◆ Gasket sealed tank lid with 0.2 micron vent filter. Dual check valve design for overflow protection. High/low full tank shut off.
- ◆ Flow meter return stack includes product loop return, flow meter, sample port, pressure relief valve, and tank drain.
- ◆ All ASAHI True Union PVC 80 Ball valves. Stainless steel pressure gauges and temperature gauge.
- ◆ All plumbing components featuring lead free, copper free, and brass free design.
- ◆ TIR 34 compliant pure water storage design; 3 ft. per second loop velocity based on proper pump sizing.

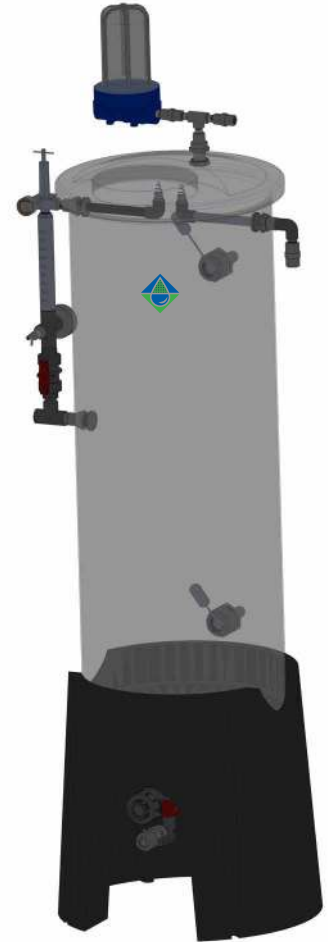

MODEL	Gallons	W x H x D	INLET	OUTLET	Return Loop	Height with poly stand
8249	55	36" x 30" x 55"	3/4"- 1"	1.5"	3/4"	65"
8250	100	40" x 30" x 83"	3/4"- 1"	1.5"	3/4"	89"
8251	250	50" x 40" x 90"	3/4"- 1"	2.0"	1"	98"
8252	325	48" x 40" x 102"	3/4"- 1"	2.0"	1"	109"

- High flow return stacks for 1.25"-2" loops available.
- Poly bases with added height also available.
- Replacement 0.2 vent filter cartridge PN:1323



**NuStream™**  
filtration

