

PHOENIX ULTRA HIGH-PURITY WATER SYSTEM

PHOENIX SYSTEM

The Phoenix Ultra High-purity Lab Water System from Aries FilterWorks delivers Type I, 18.2 Megohm water quality on demand. The water is purified using a staged purification process which includes high-purity ion exchange resins to remove dissolved minerals and internal recirculation to maintain purity. As the water exits the system, a final filter removes particulates and bacteria to reach Type I water specifications. Additional technologies are offered depending on the application, including UV and Ultrafiltration. Multiple sensors continuously monitor the system and final water quality to ensure trouble free operation.


FEATURES & BENEFITS


- 2.5 LPM* OF 18 MEGOHM TYPE 1 REAGENT WATER ON DEMAND
- INTUITIVE, USER FRIENDLY TOUCH-SCREEN INTERFACE
- REAL TIME QUALITY MONITORING WITH LEAK DETECTION
- · COMPACT DESIGN WITH REMOTE DISPENSE OPTION
- QUICK CHANGE, NO TOOLS CARTRIDGE DESIGN
- LARGE CAPACITY, LOW COST CONSUMABLES CARTRIDGES
- GENUINE RESINTECH MEDIA

*Note: Reported flow rate is typical but can vary depending on supply pressure and system options.



FLOW DIAGRAM

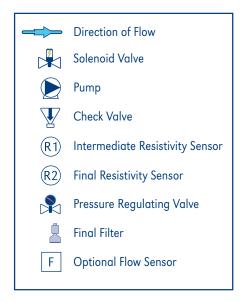

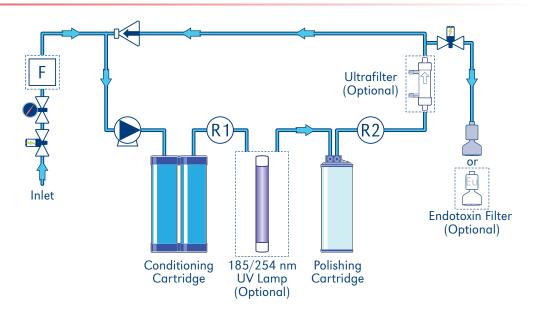

PHOENIX ULTRA HIGH-PURITY WATER SYSTEM

PHOENIX CONFIGURATIONS

Model	Academy	Citation	Biochem	Genome
	PHOENIX	PHOENIX	PHOENIX	PHOENIX
Applications	Basic Chemistry, Academic, IC Buffers	HPLC, GC/MS, Trace Organics	Life Science, Cell Culture, Microbiology	DNA Sequencing, PCR, Electrophoresis
Conditioning Cartridge	•	•	•	•
Polishing Cartridge	•	•	•	•
UV Oxidation		•		•
Ultrafiltration			•	•
0.2 micron	•	•	•	•

PERFORMANCE SPECIFICATIONS*

Resistivity	18.2 MΩ-cm	18.2 MΩ-cm	18.2 MΩ-cm	18.2 MΩ-cm
Bacteria	< 1 cfu/ml	< 1 cfu/ml	< 1 cfu/ml	< 1 cfu/ml
Endotoxin**			<0.005 EU/ml	<0.005 EU/ml
Particulates	< 0.2 µm filtration	< 0.2 µm filtration	< 0.05 µm filtration	< 0.05 µm filtration
TOC	< 15 ppb	< 5 ppb	< 15 ppb	< 5 ppb
RNase			< 0.01 ng/ml	< 0.01 ng/ml
DNase			< 4 pg/µl	< 4 pg/µl

^{*} Performance based upon RO / DI or Distillation Feed (< 20 uS/cm, < 50 ppb of TOC, 0.2 micron filtration)

Dimensions (H x W x D) 21.6 in. x 14.7 in. x 14.4 in. (54.8cm x 37cm x 36.5cm)

Weight

42 lbs. dry / 47 lbs. operating (22.7 kg dry / 25 kg operating)

Inlet Connection 3/8" O.D. Tubing (9.53 mm O.D. Tubing)

Power Requirements 120 VAC/ 60 Hz @ 1.0 amp

Pressure

90 PSIG Max. / 20 PSIG Min.

Temperature (Max.) 100°F / 30°C

Flow Rate (Typical)
0.67 Gallons Per Minute
2.5 Liters Per Minute
< 2.0 LPM with Ultrafilter &
Endotoxin filter installed

ADDITIONAL SYSTEM COMPONENTS

Installed Options & Accessories†

PHA-FM Flow Totalizer Meter
PHA-DF Direct Feed Port

PHA-DG Recirculating Dispensing Gun PHA-WB Phoenix Wall Mount Bracket

Cartridges & Filters^{††}

PX-13-5001 Phoenix Dual Conditioning Cartridge (RO Feed)
PX-13-5002 Phoenix Dual Conditioning Cartridge (SDI / TAP Feed)

PX-11-5103 Phoenix Polishing Ultrapure Cartridge

PX-11-5104 Phoenix Polishing Ultrapure Low Organics Cartridge
PF-00-6402 0.2 Micron Capsule Filter - 1/4" MNPT x 1/4" hose barb

PF-00-7101 0.2 Micron Endotoxin Removal Capsule Filter - 1/4" MNPT x 1/4" hose barb

Consumables

PF-00-7105 Phoenix Ultrafilter - 3/8" Quick Disconnect Fitting HPA-016 Phoenix UV Bulb 254/185nm TOC Destruct

HPA-017 Sanitization Kit (includes cartridges, test strips, and gloves)

Note: Ordering information subject to change without notice. Please verify all specifications prior to placing orders. For more information Call: (856) 626-1550

IMPORTANT NOTICE TO USER:

DS-Phoenix (rev 2.0)

^{**} Includes Endotoxin Removal Capsule Filter

[†] Options must be preordered for factory installation

[†] Cartridges and Filters are not included in a system and are ordered separately